

# PCR4UA408S




## Features

The Impact-R 4080S/4090S series computers are powered by Intel® based motherboards, delivering a compact and flexible computer platform.

- Intel® Coffee lake CPU architecture
- DDR4 Memory up to 64GB
- Supports dual native displays simultaneously

Our production processes are controlled under ISO 9001 and every system undergoes a full diagnostic burn-in prior to shipment.

## Dimensions

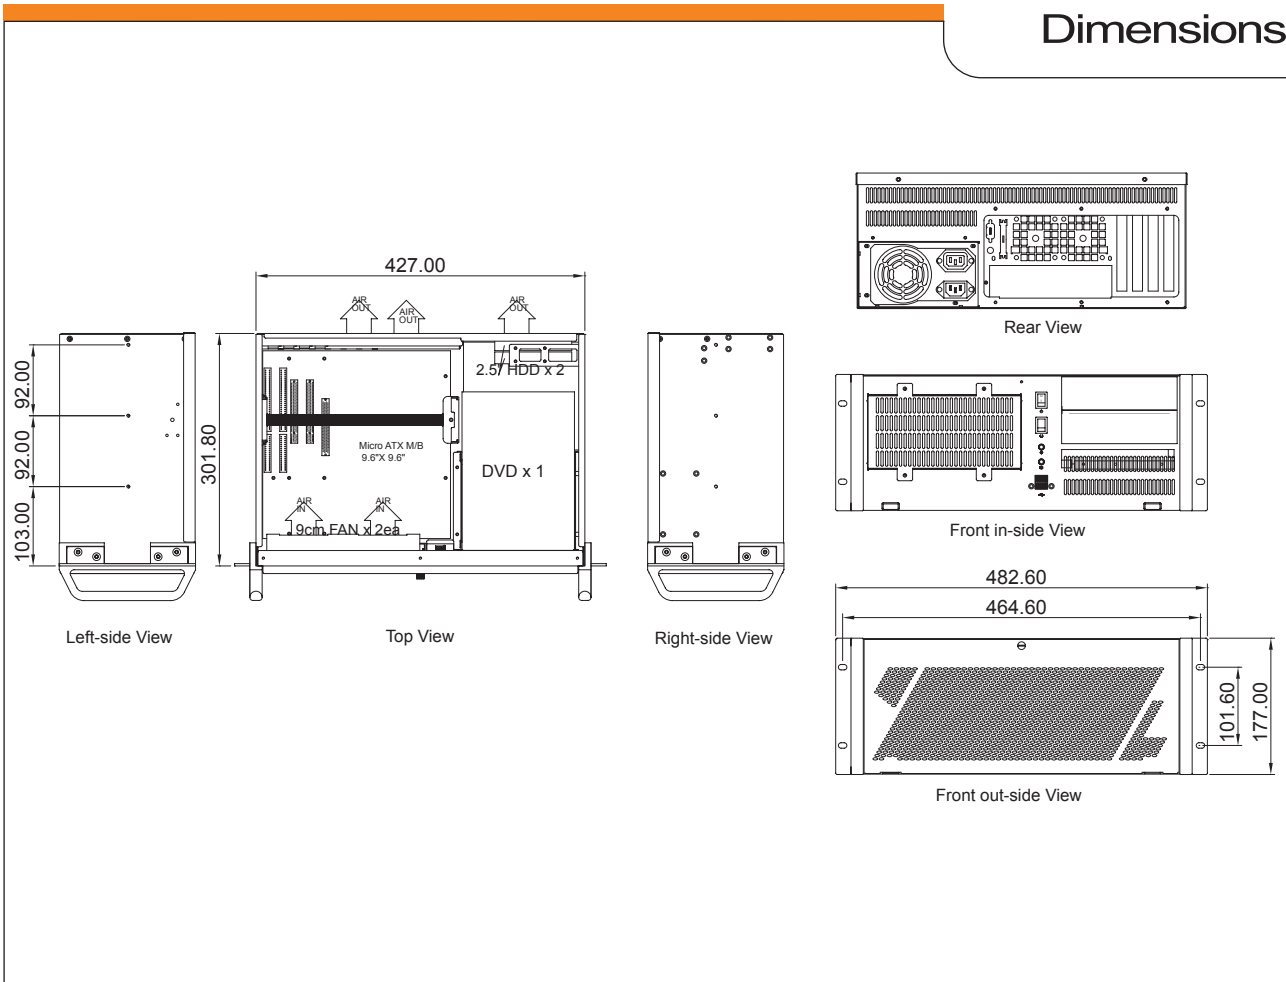

# PCR 4U A 408S

## Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Hardware Specification	<p>CPU: Intel® LGA1151 8th Gen (408xS models) or 9th Gen (409xS models) Celeron/Pentium/i3/i5/i7</p> <p>Chipset: Intel® H310</p> <p>Memory: Dual DIMM (max 64GB DDR4 2666MHz non-ECC)</p> <p>Graphics: Integrated GPU:</p> <ul style="list-style-type: none"> <li>DP - max 4096*2304 @ 60Hz</li> <li>DVI-D - max 1920*1200 @ 60Hz</li> <li>VGA - max 1920*1200 @ 60Hz</li> </ul> <p>LAN: Dual Intel® GbE (Realtek RTL8111G)</p>	Environmental operation	<p>Vibration: 0.25g sine sweep @ 1 octave per minute from: 10 to 500Hz (longitudinal)*</p> <p>Shock: 10G 1/2 sine 11ms*</p> <p>* Higher levels are achievable by use of an SSD, or ruggedized hard drive.</p> <p>Acoustic noise: 49dB(A) sound pressure at 23°C (typical)</p> <p>Temperature: 5 to 60°C (tested for extended operation up to 50°C)</p> <p>Humidity: 5 to 90% at 25°C non-condensing</p> <p>Low noise fan options are available (maximum operating temperature 35°C)</p> <p>We can design systems to meet additional requirements</p>
BIOS	AMI EFI 128 Mbit SPI	Environmental storage	<p>Temperature: -20 to 70°C</p> <p>Humidity: 5 to 90% at 25°C non-condensing</p>
Storage	<p>2 x 2.5" SSD/HDD</p> <p>1 x M.2 (B Key) (2242/3042)</p>	Certifications	CE/UKCA
System Expansion	<p>1 x PCIe16</p> <p>1 x PCIe1</p> <p>2 x PCI</p> <p>M.2 (B Key) 1 (2242/3042 with SIM card holder)</p>		
System Architecture	Micro ATX		
Supported O/S	Microsoft Windows 10 64-bit		
LED's and Switches	<p>Power (PC on) LED</p> <p>Hard Disk Drive access LED</p> <p>ATX system control switch</p> <p>System reset switch</p>		
External Interfaces	<p>Front:</p> <p>2 x USB 2.0/1.1 On/Off Switch, Reset Pwr/HDD LED</p> <p>Rear:</p> <p>2 x GbE (RJ-45)</p> <p>8 x USB 3.1 (Gen1)</p> <p>4 x USB 2.0</p> <p>1 x VGA 1 x DVI-I (DVI-D signal)</p> <p>1 x DP++</p> <p>1 x Line-out</p> <p>1 x Mic-in</p>		
Optional Breakout Interfaces (Will use 1 slot per breakout)	<p>8 x RS-232, 2 x RS-232/422/485</p> <p>4 USB 2.0</p> <p>Ps/2</p>		
iAMT	Rev: 12.0		
Mechanical	<p>Design: EIA RS-310C 19" Rackmount Standard</p> <p>Construction: Heavy Duty Cold Rolled Electroplated Steel</p> <p>Color: Black (Standard), Beige or Custom</p> <p>Dimensions: 483(W) x 177(H) x 302(D)mm (19" x 7" x 11.9")</p> <p>Package Size: 605(W) x 340(H) x 545(D)mm (23.8" x 13.4" x 21.4")</p> <p>Cooling Units: 2x92mm(51CFM each) &amp; 2x60mm(23.5CFM each)</p> <p>Gross Weight: 12.1 kg</p>		