

## PCR4UA412



#### **Features**


The Impact 4120 series computers are powered by Intel® based commercial motherboards, delivering a compact and flexible computer platform.

#### Key features:

- Intel® Alder Lake CPU architecture
- DDR4 Memory up to 128GB
- Supports 3 native displays simultaneously

Our production processes are controlled under ISO 9001 and every system undergoes a full diagnostic burn-in prior to shipment.

### **Dimensions**

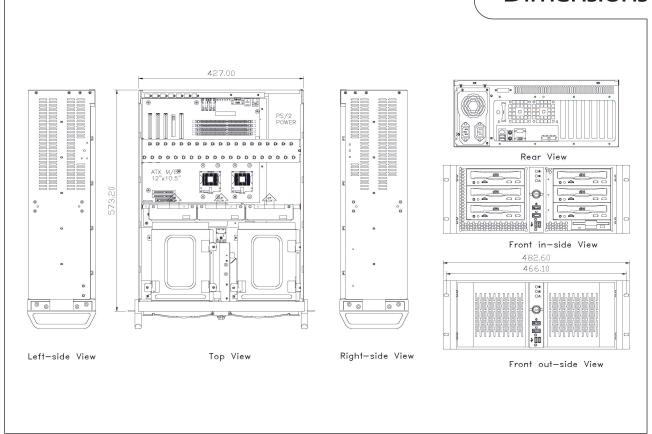



# **PCR4UA412**

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

### **Specifications**

Hardware Specification  BIOS  Display	CPU: Intel® LGA1700 12th Generation Core™ 17/i5/i3 Chipset: Intel® 8660 Memory: 4 x DIMM - max 128GB DDR4 3200MHz non-ECC LAN: Intel® 1Gb Ethernet  AMI Supports max. 4K@60Hz as specified in DisplayPort 1.4. Supports 4K@60Hz as specified in HDM1 2.1.	Mechanical	Design: EIA RS-310C 19" Rackmount Standard Construction: 1.2mm SECC Zinc-Coated Steel Security: Lockable front door Colour: Black (custom colours available for large orders) Dimensions: 483 x 177 x 573mm (19.0" x 7.0" x 22.6") Packaging Size: 590mm x 331mm x 750mm (23.2" x 13.0" x 29.5") Cooling: 3x 120mm ball bearing fan Air filter: removable (washable) Gross Weight: approximately 22 kg
Storage	Total Drive capacity: 6 x 5.25" external, 1 x 3.5" external, 1 x 3.5" internal RAID: 0, 1, 5, 10 Dual M.2 available 4 x SATA ports	Environmental Operation	Acoustic noise: Approximately 49dB(A) sound pressure at 23°C (typical) Temperature: 5 to 45°C (tested for extended operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing
System Expansion	1 x PCle 4.0/3.0 x16 slot 1 x PCle 3.0 x16 slot (supports x4 mode) 1 x PCle 3.0 x16 slot (supports x1 mode) 1 x PCle 3.0 x16 slot (supports x1 mode) M.2. 1 slot (Key M), type 2242/2260/2280 M.2. 2 slot (Key M), type 2242/2260/2280 (supports PCle 4.0 x4 mode)	Environmental Storage	Temperature: -20 to 65°C Humidity: 5 to 90% at 25°C non-condensing UKCA/CE
Supported O/S	Windows 11 / 10 / Linux		
System Architecture	Intel® Based commercial motherboard		
External Interfaces	Front:  2 x USB 2.0/1.1  On/Off Switch, Reset Pwr/HDD LEDs Rear:  2 x USB 3.2 Gen 2 ports (2 x Type-A )  4 x USB 2.0 ports (4 x Type-A)  1 x DisplayPort  2 x HDMI® ports  1 x Intel® 1Gb Ethernet port  3 x Audio jacks  1 x PS/2 Keyboard/Mouse combo port		

